

SLIDING DOOR

THERMALLY IMPROVED SUITE - INLINE FRAME



Sliding doors encourage access to the outdoors from interior living spaces, permitting egress & efficient ventilation. The slimline operation results in minimal intrusion into rooms or walkways



The secure lock assembly features anti-lift pins & is key lockable from both sides


Outer frame corners are mitred to enhance the clean appearance. All fixings are made from durable stainless steel

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. Sliding panels are weatherproofed through dual wool-pile seals at the head, jamb, sill & interlocker

Fly screens fit to the outside, & run on tracks within the door's outer frame


All panels roll on two 50kg rated, ball-bearing carriages which run on an anodised track insert

The optional snap-in frame closure has a 15 x 3mm pocket for flashing insertion, whilst the inline reveal simplifies installation into a broad range of construction styles

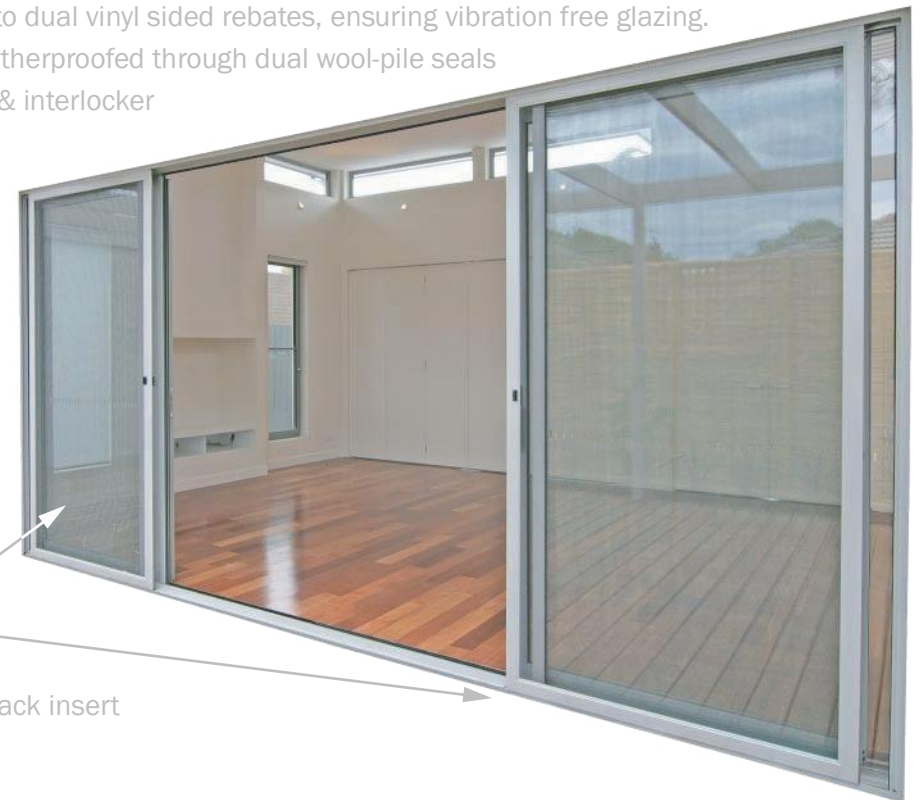

SLIDING DOOR

THERMALLY IMPROVED SUITE - INLINE FRAME

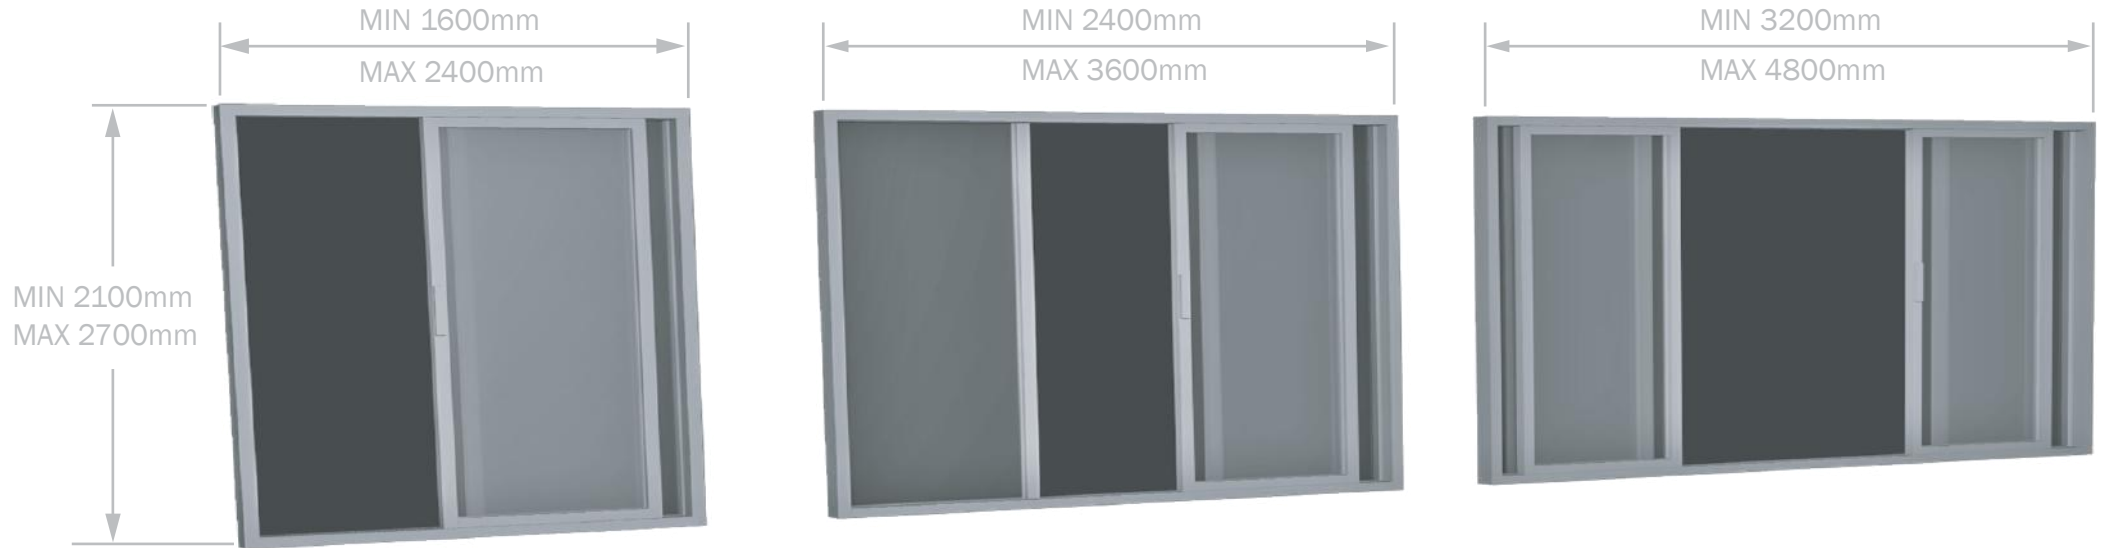

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR PRACTICAL PURPOSES, WHERE DOOR HEIGHT EXCEEDS 2400mm, A SLIDING PANEL WIDTH RESTRICTION OF 1000mm APPLIES. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR VALLEY WINDOWS CONSULTANT

Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Glazing to be grade A safety glass

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & depth

Optional: handle type & colour, patio bolts, flyscreen, frame infill, frame equaliser, sill flap, glass type